

suprema BioEntry W2

Outdoor IP Fingerprint Device



| BioEntry W2 |

Suprema BioEntry W2 is a rugged fingerprint access control device featuring Suprema's next generation biometric technology and security platform. BioEntry W2 provides class-leading performance and security by featuring Suprema's latest fingerprint algorithm coupled by powerful quad-core CPU and LFD (live finger detection) technology. The device also provides added flexibility in system design by featuring multi card reading with dual-frequency RFID technology. Packed in a rugged IP67/IK08 housing with sleek metallic finish, BioEntry W2 is a perfect access control solution for tough environment and outdoor installation.








SUPREMA BioEntry W2

Outdoor IP Fingerprint Device



Features

- 
Best-in-class Performance
 - Latest Suprema algorithm
 - 1.2GHz quad-core CPU
- 
Improved Accuracy & Security
 - New advanced Live Finger Detection(LFD) technique
 - High-precision OP5 optical sensor
- 
Expanded Capacity
 - Max. 500k users/1 million text logs
 - Large memory: 2GB Flash + 256 MB RAM
- 
Rugged Structure
 - IK08 impact protection
 - IP67 ingress protection
 - Ideal for outdoor installation
- 
Multi RFID Card Reading
 - LF(125KHz), HF(13.56MHz) dual-band
 - Reads all card types that HID multiCLASS supports (EM/HID Prox/MIFARE/iCLASS/DESFire/FeliCa/NFC)


Specifications

IP67 IK08


Biometric	Fingerprint						
Sensor Type	Optical Sensor (OP5)						
Template	SUPREMA / ISO 19794-2 / ANSI 378						
Extractor / Matcher	MINEX certified and compliant						
LFD	Supported						
RF Option	<table border="1"> <thead> <tr> <th>BEW2-OHP</th> <th>BEW2-ODP</th> <th>BEW2-OAP</th> </tr> </thead> <tbody> <tr> <td>125 KHz HID Prox</td> <td>125KHz EM 13.56MHz MIFARE,FeliCa,NFC</td> <td>125 KHz EM/HID Prox 13.56 MHz MIFARE/DESFire(EV1) /FeliCa/NFC/CLASS(SE)</td> </tr> </tbody> </table>	BEW2-OHP	BEW2-ODP	BEW2-OAP	125 KHz HID Prox	125KHz EM 13.56MHz MIFARE,FeliCa,NFC	125 KHz EM/HID Prox 13.56 MHz MIFARE/DESFire(EV1) /FeliCa/NFC/CLASS(SE)
BEW2-OHP	BEW2-ODP	BEW2-OAP					
125 KHz HID Prox	125KHz EM 13.56MHz MIFARE,FeliCa,NFC	125 KHz EM/HID Prox 13.56 MHz MIFARE/DESFire(EV1) /FeliCa/NFC/CLASS(SE)					
CPU	1.2 GHz Quad Core						
Memory	2GB Flash + 256 MB RAM						
Max. User	500,000 (1:1), 100,000(1:N)						
Max. Template	1,000,000(1:1), 200,000(1:N)						
Max. Logs	1,000,000(text)						
LED	Multi-Color						
Sound	Multi-tone Buzzer						
Ethernet	10/100 Mbps, auto MDI/MDI-X						
RS-485	1ch host or slave (selectable)						
Wiegand	1ch input or output (selectable)						
TTL	2ch input						
Relay	1 Relay						
PoE	IEEE802.3af						
Ingress Protection	IP67						
Impact Protection	IK08						
Tamper	Supported						
Power	Voltage: DC 12V Current: Max. 600 mA						
Operating Temperature	-20°C ~ 50°C						
Operating Humidity	0% ~ 80%, non-condensing						
Dimensions (WxHxD, mm)	50 x 172 x 43.5						
Unit Weight	251g						
Certificates	CE, FCC, KC, RoHS, REACH, WEEE						

System Configuration


• Standalone

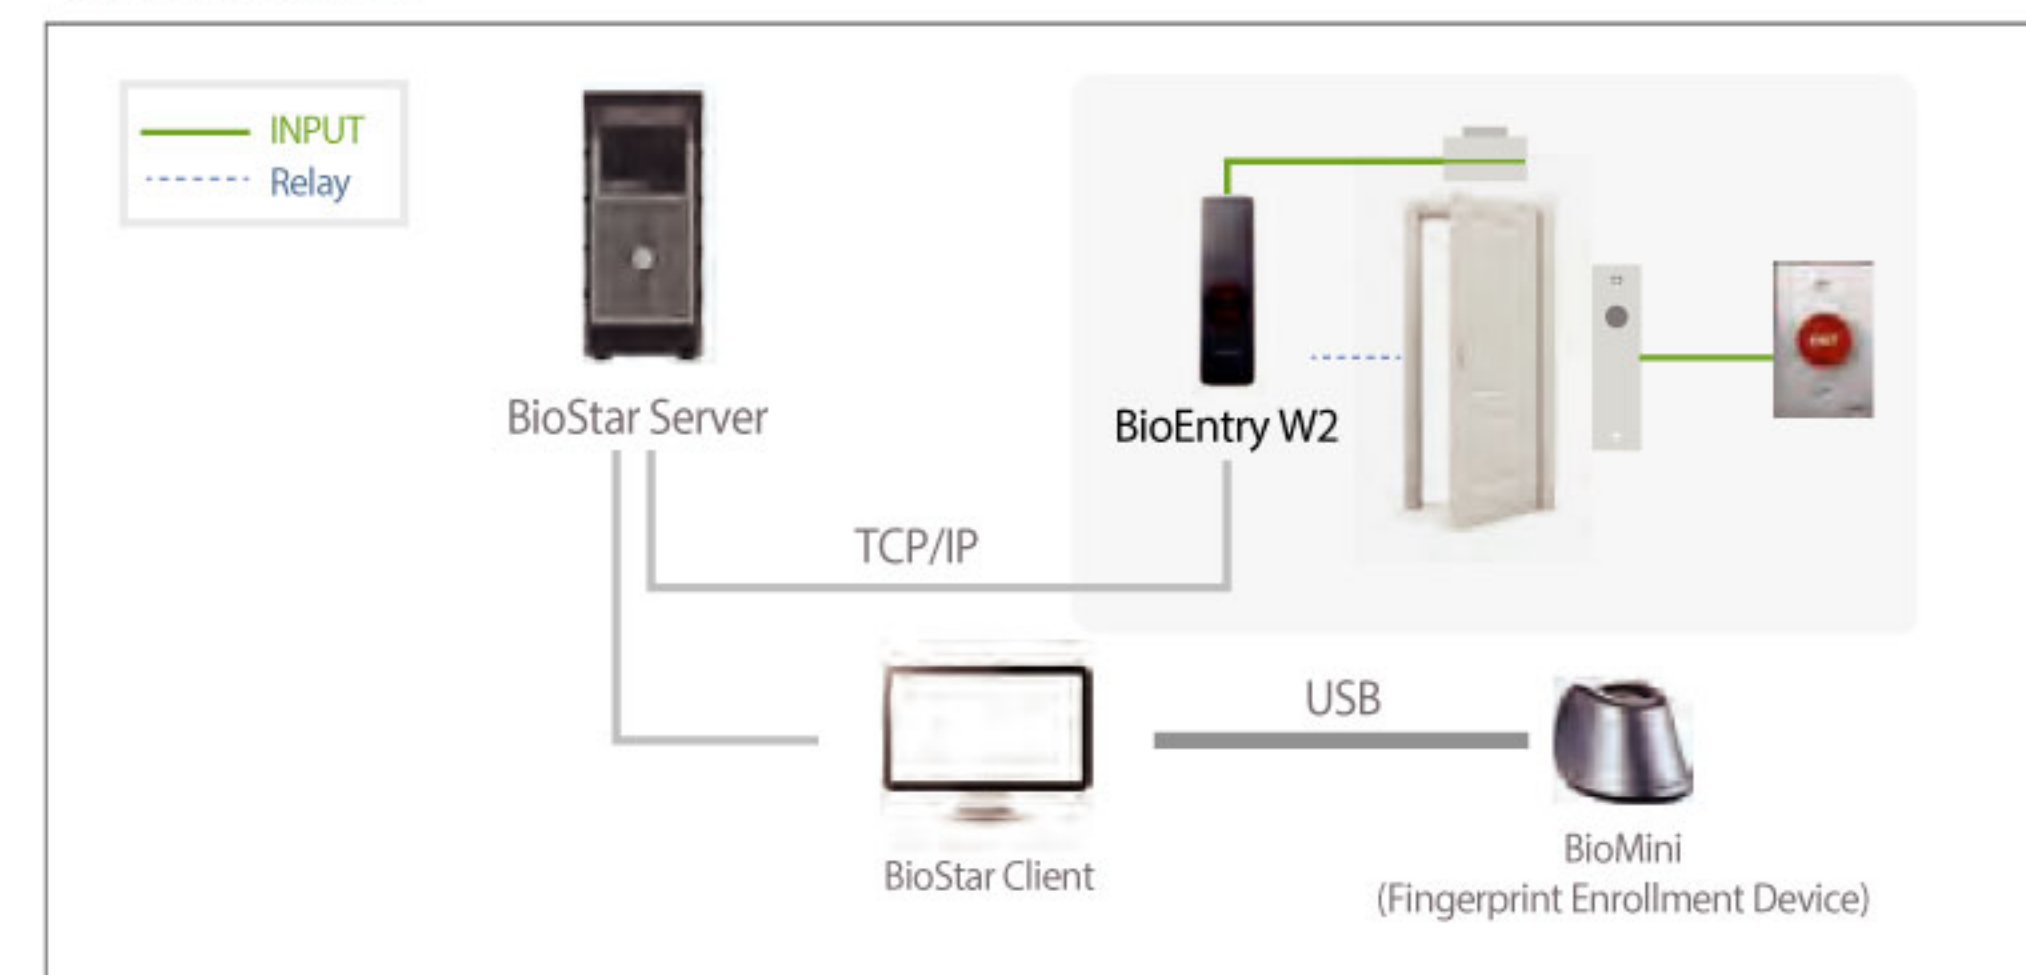

• Standalone-Secure

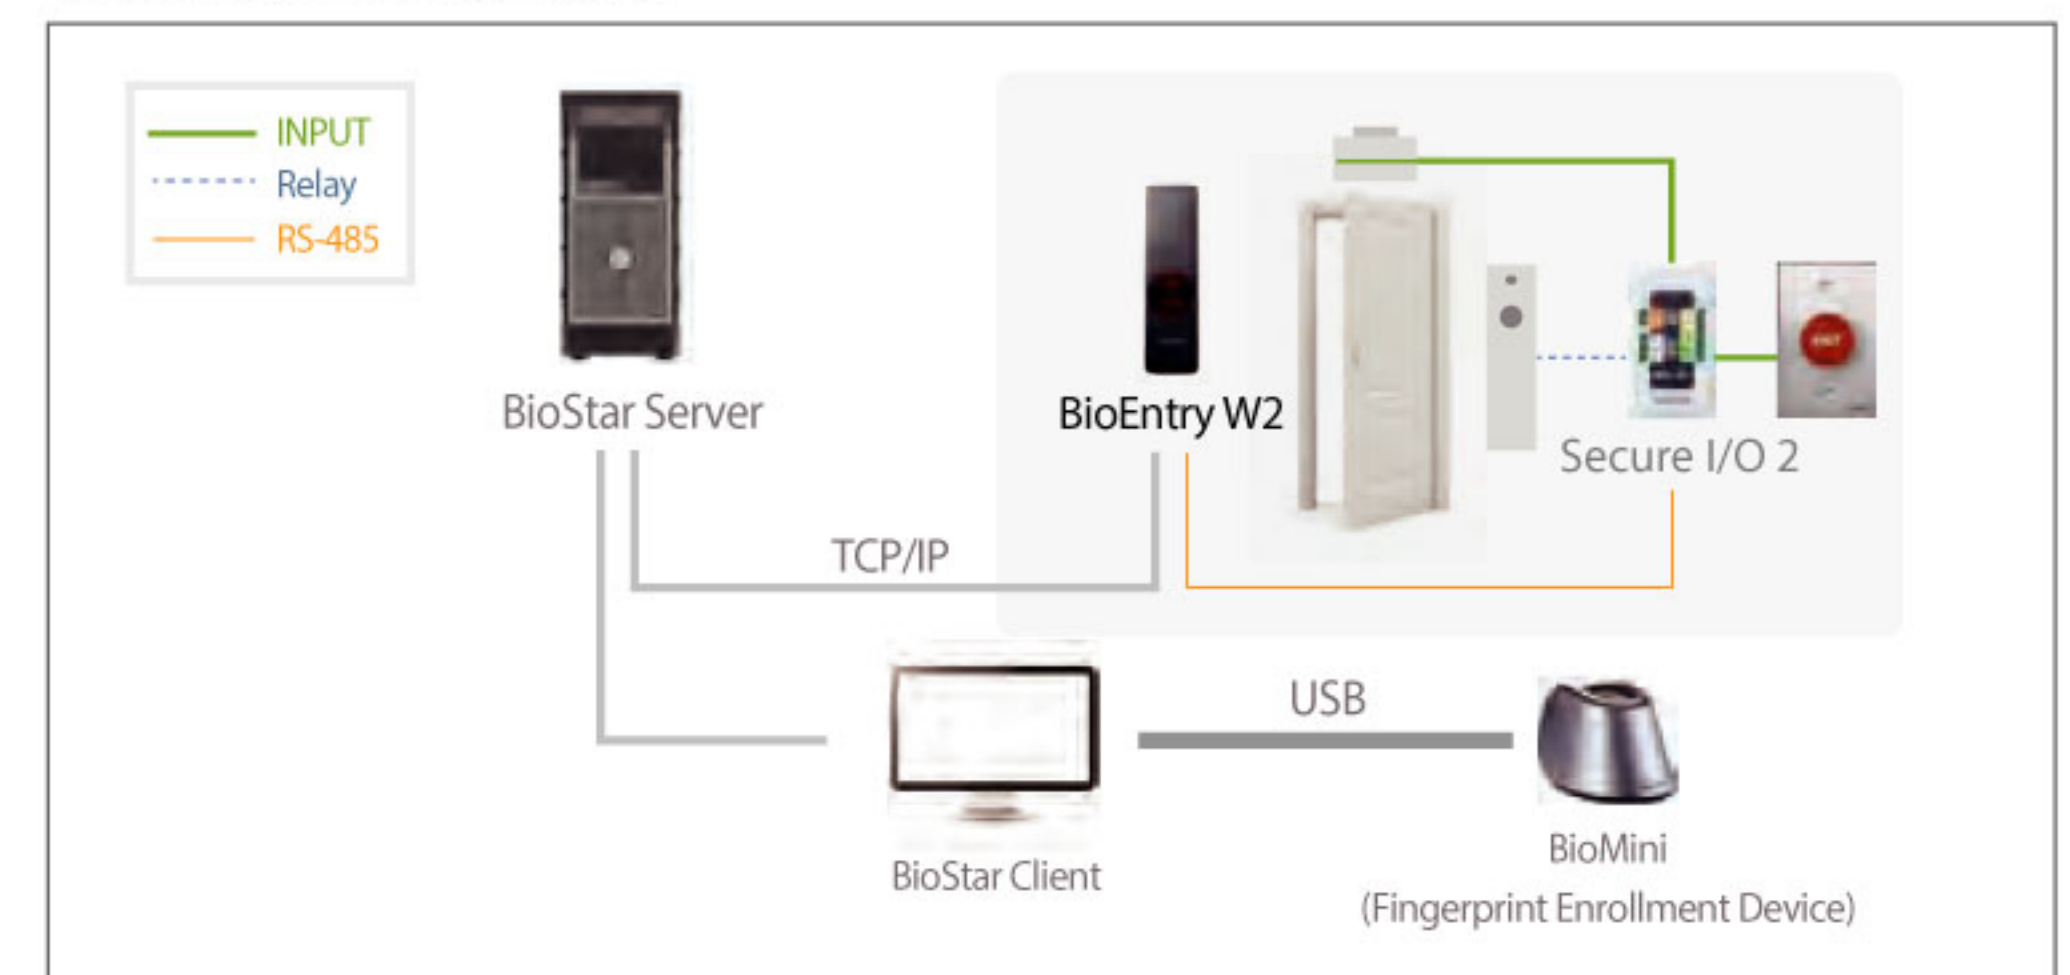

• Distributed Access Control Systems

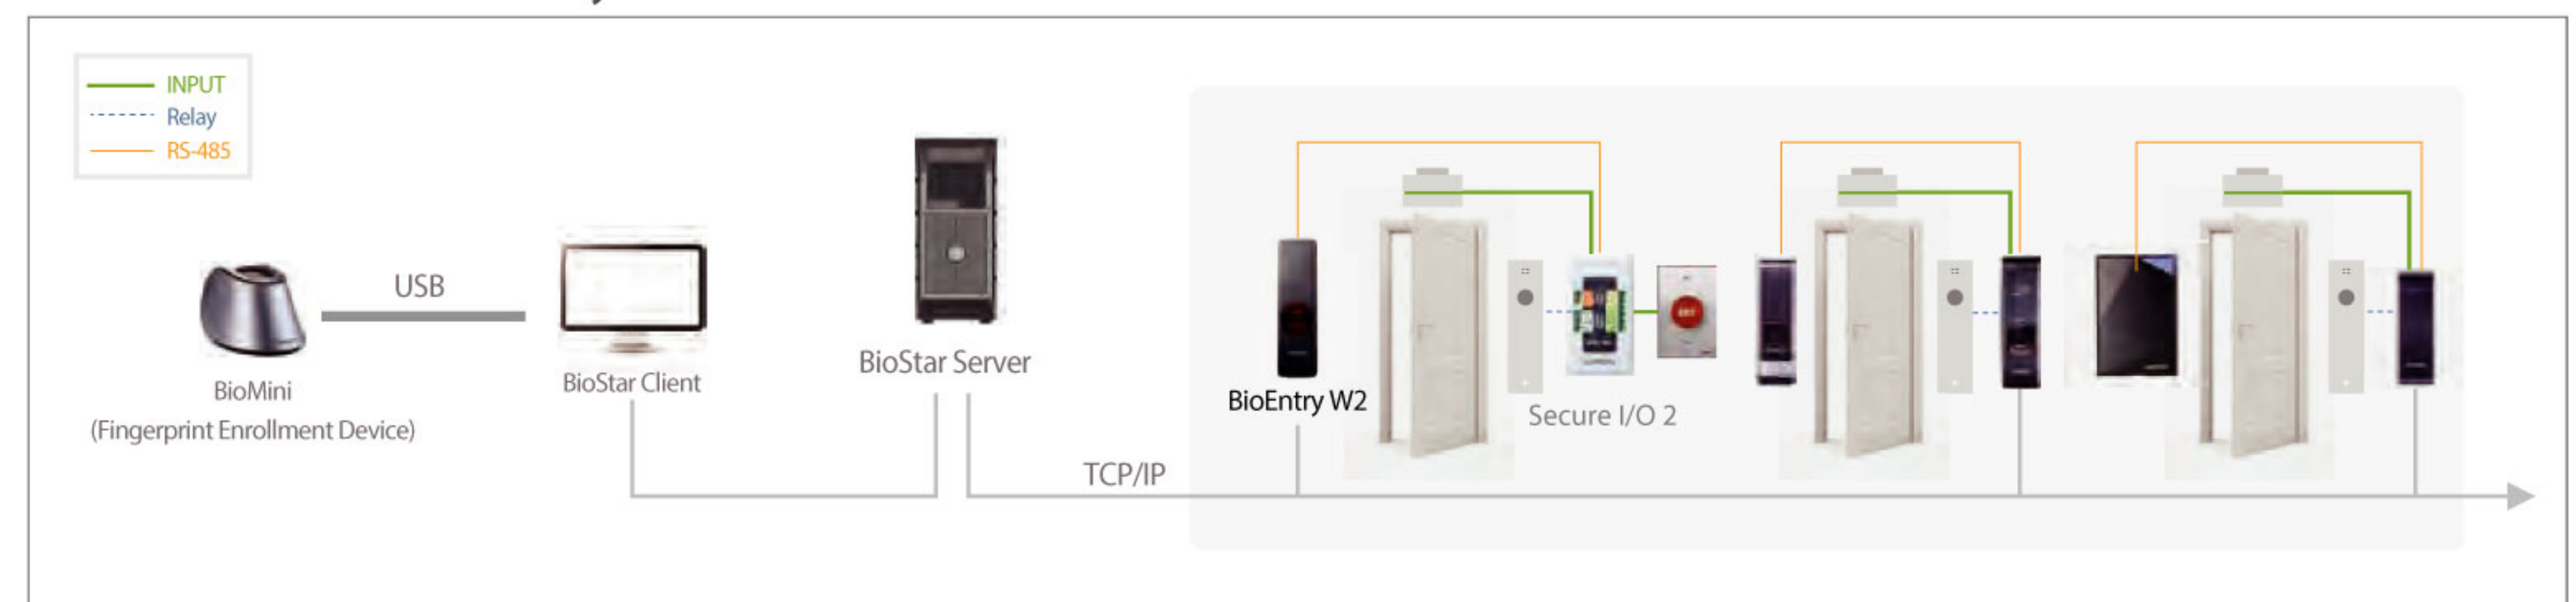

931 Rama 1 Rd., Patumwan Bangkok 10330 Tel. 02-2150105-8, 02-2160318-21, 02-2162901-5, 02-2160309-14
 Fax: 02-2162907, 02-2162909 Email: info@tanabutr.co.th URL: www.tanabutr.co.th