

Progressive Technology

Xpass effortlessly combines key features of a traditional access control system in a compact form factor and is a cornerstone in Suprema's distributed IP access control system. Xpass can be used in both indoor and outdoor environments and the Power-over-Ethernet connection allows for quick and easy installation.



IP Access Control



Sleek Unobtrusive Design



Environment protection (IP65)



Versatile Interface




Power-over-Ethernet Support



Specifications



Capacity	Max User	40,000
	Max Template	-
	Max Log	50,000 (Text)
Interface	Comm.	TCP/IP, RS485
	Wiegand	1ch In or Out
	Input / Output	2 TTL Inputs 1 Relay
H/W	CPU	533MHz DSP
	Memory	16MB RAM + 8MB Flash
	LCD	-
	Operating Temp.	-20° to 50°C
	Power	12VDC, PoE
	Dimensions	45 x 130 x 27 mm (W x H x D)

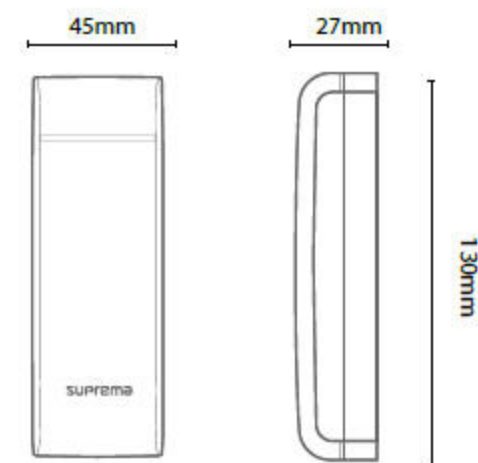

RFID CARD OPTIONS

- 125KHz EM
- 125KHz HID Prox
- 13.56MHz Mifare/DESFire