


suprema Xpass S2



Features

- 16MHz 8-bit microprocessor
- 4 digital inputs and 2 relay outputs
- -35°C to 65°C
- TCP/IP, RS485, Wiegand interface
- 100,000 users, 100,000 logs
- 64 zones
- MiFare, DESFire, ISO14443A/B, ISO15693, FeliCa, NFC
- S/EU/ASIA gang box
- IP65
- 12V DC (Max. 300mA)
- 80(W) x 120(H) x 11.4(D) mm




- X 16MHz 8-bit microprocessor
- X 4 digital inputs and 2 relay outputs
- F A :
- 143 x 82 x 35 mm (W x H x D)

Specifications

| | |
|-----------------------|--|
| RF Card | 13.56MHz ISO14443A/B, ISO15693, Mifare, Desfire(CSN), Felica |
| User Capacity | 50,000 |
| Log Capacity | 100,000 |
| Network Interfaces | TCP/IP, RS485 |
| Wiegand | In or Out (Switchable) |
| TTL I/O | 2 x Input |
| Relay | 1 x Output |
| CPU | 32-bit Microprocessor (533Mhz) |
| Memory | 16MB Flash + 16MB SDRAM |
| Indicator | Multi-color LED |
| Sound | Multi-tone Buzzer |
| Ingress Protection | IP65 |
| Operating Temperature | -35°C - 65°C |
| Tamper | Optical Tamper |
| Operating Voltage | 12V DC (Max. 300mA) |
| Dimensions (mm) | 80(W) x 120(H) x 11.4(D) |
| Certificates | CE, FCC, MSIP (KCC), IP65, RoHS, REACH, WEEE |

Installation

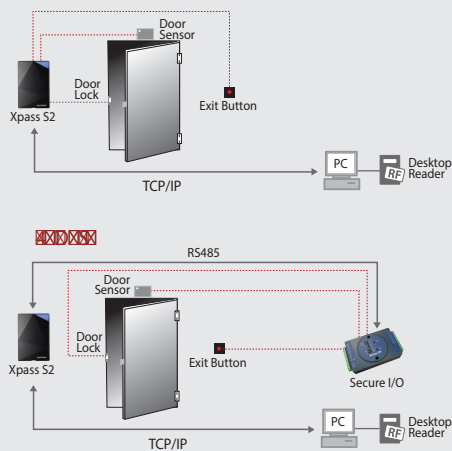

Configuration

